

65m - 1.200kg
1

55m - 2.000kg
2


50m - 2.300kg
3

45m - 2.600kg
4

40m - 2.900kg
5





28m - 3.100kg
6

28m - 3.100kg
7

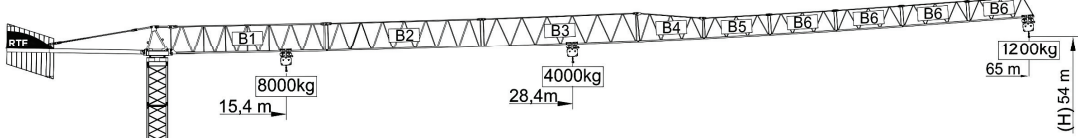

Yük Diagramı

			 kg/m 8000 M / Kt 4000	 m Kg	18	23	28	33	38	40	45	50	55	60	65
20000 kg 4x2000 + 4x1500 kg	65m	B61+B62+B63+B64+B65 B65+B66+B66+B66	26.6 m		4000	4000	3780	3090	2590	2420	2070	1780	1550	1360	1200
18000 kg 6x2000 + 4x1500 kg	60m	B61+B62+B63+B64 B65+B66+B66+B66	28.4 m		4000	4000	4000	3350	2810	2640	2270	1970	1730	1500	1200
18000 kg 6x2000 + 4x1500 kg	55m	B61+B62+B63+B64 B65+B66+B66	32 m		4000	4000	4000	3860	3260	3060	2640	2310	2000		
18000 kg 6x2000 + 4x1500 kg	50m	B61+B62+B63+B64 B65+B66	32.4 m		4000	4000	4000	3910	3300	3100	2680	2300			
16000 kg 5x2000 + 4x1500 kg	45m	B61+B62+B63+B64+B66	32.1 m		4000	4000	4000	3870	3270	3070	2600				
14000 kg 4x2000 + 4x1500 kg	40m	B61+B62+B63+B64	31.2 m		4000	4000	4000	3740	3150	2900					
13000 kg 5x2000 + 2x1500 kg	38m	B61+B62+B64+B65+B66	31.5 m		4000	4000	4000	3790	3100						
11000 kg 4x2000 + 2x1500 kg	33m	B61+B62+B64+B65	30.4 m		4000	4000	4000	3500							



RTE 6512 Kule Vinç




65m - 1.200kg

8.000Kg

Kaldırma-Dönüş ve
Şarj Hızı

0 a 72 m/min 0 a 36 m/min	45kW
0 a 1 r.p.m.	2x5 daN.m
0 a 60 m/min	5,5 kW
15 m/min	2x3 kW
	35 kVA
400 V +- 5% (50/60 Hz)	

Şeçenekler

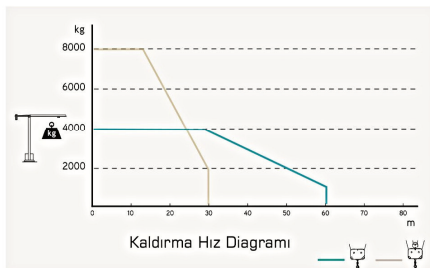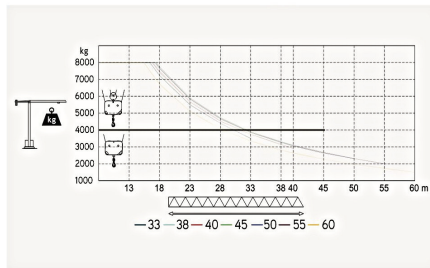

Parçalar

	A (mm)	B (mm)	C (mm)		Code
B61	11850	1310	2900	4280	531 60 15
B62	11850	1160	2250	1280	
B63	11850	1160	2250	1020	
B64	5110	1160	2250	400	
B65	5110	1160	1610	330	
B66	5110	1160	1610	3x300 900	
RS8 R/8	2250	1600	2050	3120	
P2	1650	1320	2030	750	
CL4	11400	1500	500	4000	
CP3	1160	165	3140	6x2000 12000	
CP1	1160	330	3140	4x1500 6000	
					704 10 00
					704 20 00
					34080
B1	12000	1620	1620	3450	508 12 00
B1	6130	1620	1620	1800	508 06 00
B1	3195	1620	1620	1070	508 06 01
B1	3195	1830	1830	1100	508 06 03
B1	1775	1600	1600	650	508 06 02
B1	7371	500	1040	2200	608 00 01
B1	3450	340	1040	2x1125 2250	
					4450